







Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 1 of 7

SOYANG TECHNICAL TEXTILE (ZHEJIANG) CO., LTD

NO.36 JINNIU ROAD, JIANSHAN DISTRICT, HAINING CITY, ZHEJIANG PR., CHINA

Sample Description: 100% POLYESTER WARP-KNITTED POPULAR FLAG FABRIC

SGS Ref No.: CZHL2306003662SD

Style No.: ST-110

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

EN 13501-1:2018 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests.

Test Results: -- See attached sheet -

Test Period:

Sample Receiving Date : JUN.05, 2023

Test Performing Date : JUN.05, 2023 TO JUN. 16, 2023

Signed for and on behalf of SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Condit



Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 2 of 7

I. Test conducted

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2020+A1:2022 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- EN ISO 11925-2:2020 Reaction to fire tests Ignitability of products subjected to direct impingement of flame — Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "100% polyester warp-knitted Popular Flag Fabric (provided by client)" is defined as a decorative sheet. Its classification is valid for the following end use application: Applies to all kinds of flag application.

b) Description

Description	100% polyester warp-knitted Popular Flag Fabric (provided by client)		
Color	White		
Sample size	EN 13823: 1500mm×1000mm & 1500mm×495mm EN ISO 11925-2: 250mm×90mm		
Mass per unit area	ss per unit area 110 g/m²		
Exposed surface	Marking surface		

Mounting and fixing:

Calcium silicate board, with its density approximate 900kg/m³, thickness approximate 9mm, is as the backing board. The test specimens are fixed mechanically to the substrate. No joint in the long wing of the specimens.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its invervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307



Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 3 of 7

III. Test results

Test method	Parameter	Number of tests	Results
EN 13823 Warp Direction	FIGRA _{0.2MJ} (W/s)		1.1
	FIGRA _{0.4MJ} (W/s)		0
	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)		No
	THR _{600s} (MJ)	3	0.2
	SMOGRA (m²/s²)		0.6
	TSP _{600s} (m ²)		1.4
	Flaming particles or droplets (Yes/No)		No
EN ISO 11925-2 Exposure = 30 s	Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No)	mm within 60s	
	Ignition of the filter paper (Yes/No)		No

IV. Classification and field of application

a) Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

b) Classification

The product, 100% polyester warp-knitted Popular Flag Fabric (provided by client), in relation to its reaction to fire behaviour is classified:

Fire behaviour		Smoke production			Flaming	droplets
В	_	S	1	,	d	0

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/ferms-en-Document.aspx.. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document tadvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755), 8307



Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 4 of 7

c) Field of application

This classification is valid for the following end use applications:

- --- With all substrates classified as A1 or A2.
- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

--- Characteristics as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.





Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 5 of 7

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)		Classification criteria	Additional classification	
A1	EN ISO 1182 ª	and	△T≤30°C, and △m≤50%, and t=0(i.e. no sustained flaming)	-	
	EN ISO 1716		PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ² ^d and PCS≤2.0MJ/kg ^e	-	
	EN ISO 1182 a or		<i>∆T</i> ≤50°C, and <i>∆m</i> ≤50%, and t≤20 s	-	
A2 EN	EN ISO 1716	and	PCS≤3.0MJ/kg a and PCS≤4.0MJ/m² b and PCS≤4.0MJ/m² d and PCS≤3.0MJ/kg e	-	
	EN 13823		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
В	EN 13823 and		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure =30s		within 60s <i>F</i> s≤150mm	- Flaming droplets/particles •	
С	EN 13823	and	FIGRA≤250W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤15MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure=30s		<i>F</i> s≤150mm within 60 s	Flaming droplets/particles	
D	EN 13823	and	FIGRA≤750W/s	Smoke production ^f and	
	EN ISO 11925-2 i Exposure=30s		<i>F</i> s≤150mm within 60 s	Flaming droplets/particles ^g	
Е	EN ISO 11925-2 i Exposure =15s		<i>F</i> s≤150mm within 20 s	flaming droplets/particles h	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/T



Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 6 of 7

_	EN ISO 11925-2 ⁱ	<i>F</i> s>150mm within 20 s	
	Г	Exposure = 15 s	FS / 150111111 WILITIA 20 S

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ^c Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR_{600s} ≤ 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- e For the product as a whole.
- $^{\rm f}$ s1 = SMOGRA ≤ $30 \text{m}^2/\text{s}^2$ and TSP_{600s} ≤ 50m^2 ; s2 = SMOGRA ≤ $180 \text{m}^2/\text{s}^2$ and TSP_{600s} ≤ 200m^2 ; s3 = not s1 or s2
- g d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.
- Ignition of the paper in EN ISO 11925-2 results in a d2 classification.
- h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- Under conditions of surface flame attack and, if appropriate to the end–use application of the product, edge flame attack.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/frems-en-Document.aspx.. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report No.: AJFS230604712FF-01 Date: JUN.19, 2023 Page 7 of 7

Photo Appendix:

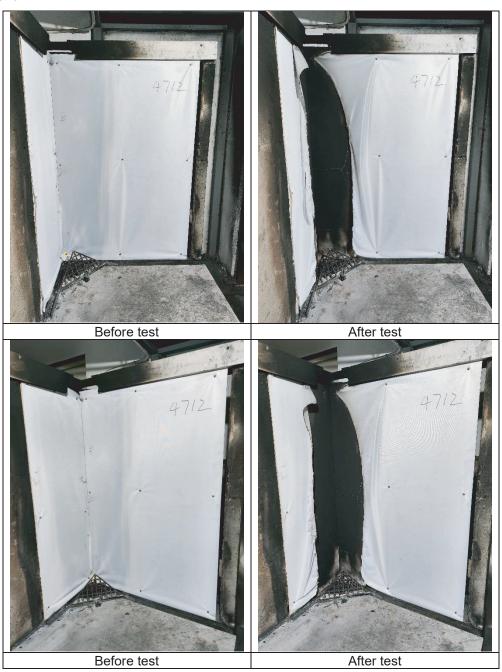

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Termd-Conditions/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/Terms-e-Document.sgs.com/en/T

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com