







Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 1 of 7

SOYANG TECHNICAL TEXTILE (ZHEJIANG) CO, LTD

NO.36 JINNIU ROAD, JIANSHAN NEW AREA JIAXING HAINING

Sample Description: WHITEBACK SOFT FABRIC

SGS Ref No.: CZHL2401000889HI

Style No.: ST-206D

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

EN 13501-1:2018 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests.

Test Results: -- See attached sheet -

Test Period:

Sample Receiving Date : JAN.31, 2024

Test Performing Date : JAN.31, 2024 TO FEB.20, 2024

Signed for and on behalf of

SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch

Echo Li Approved Signatory







Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 2 of 7

I. Test conducted

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements-Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2020+A1:2022 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- 2. EN ISO 11925-2:2020 Reaction to fire tests Ignitability of products subjected to direct impingement of flame Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "WHITEBACK SOFT FABRIC (provided by client)" is defined as a decorative sheet. Its classification is valid for the following end use application: backdrop.

b) Description

| Description | WHITEBACK SOFT FABRIC (provided by client) | | |
|---|--|--|--|
| Color | White | | |
| Sample size EN 13823: 1500mm×1000mm & 1500mm×495mm EN ISO 11925-2: 250mm×90mm | | | |
| Mass per unit area | 287 g/m ² | | |
| Exposed surface | Marking surface | | |

Mounting and fixing:

Calcium silicate board with a density of approximate 900kg/m³ and a thickness of approximate 9mm, was used as the substrate. The test specimens were fixed mechanically to the substrate with screws. No joint in the long wing of the specimens.





Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 3 of 7

III. Test results

| Test method | Parameter | Number of tests | Results |
|-----------------------------------|--|-----------------|---------|
| | FIGRA _{0.2MJ} (W/s) | | 60.5 |
| | FIGRA _{0.4MJ} (W/s) | | 60.5 |
| EN 13823 | Whether lateral flame spread (LFS) to the edge of specimen (Yes/No) | | No |
| | THR _{600s} (MJ) | 3 | 3.2 |
| | SMOGRA (m²/s²) | | 19.3 |
| | TSP _{600s} (m ²) | | 33.7 |
| | Flaming particles or droplets (Yes/No) | | No |
| EN ISO 11925-2 Exposure = 30 s | Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No) | 12 | No |
| | Ignition of the filter paper (Yes/No) | | No |

IV. Classification and field of application

a) Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

b) Classification

The product, WHITEBACK SOFT FABRIC (provided by client), in relation to its reaction to fire behaviour is classified:

| Fire behaviour | | Smoke production | | | Flaming droplets | |
|----------------|---|------------------|---|---|------------------|---|
| В | _ | S | 1 | , | d | 0 |

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.





Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 4 of 7

c) Field of application

This classification is valid for the following end use applications:

- --- With all substrates classified as A1 or A2
- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

--- Characteristics as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlea available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflect the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sol responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligation under the transaction documents. This document and obligation under the transaction documents. This document are the transaction documents are transaction from exercising all their rights and obligation to the transaction for grey or falsification of the content or appearance of this document is unlawful and offenders may be prosecute to the fullest extent of the law Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and suc sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 144



Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 5 of 7

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

| Class | Test method(s) | | Classification criteria | Additional classification | |
|----------------|--|-----|---|--|--|
| | EN ISO 1182 a | and | △ T≤30°C, and △ m≤50%, and t=0(i.e. no sustained flaming) | - | |
| A1 EN ISO 1716 | | | PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ^{2 d} and PCS≤2.0MJ/kg ^e | - | |
| | EN ISO 1182 a or | | △ <i>T</i> ≤50°C, and △ <i>m</i> ≤50%, and t _f ≤20 s | - | |
| | EN ISO 1716 | and | PCS≤3.0MJ/kg a and PCS≤4.0MJ/m² b and PCS≤4.0MJ/m² d and PCS≤3.0MJ/kg e | - | |
| | EN 13823 | | FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge> | Smoke production ^f and Flaming droplets/particles ^g | |
| В | EN 13823 | and | FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge> | Smoke production ^f and Flaming droplets/particles ^g | |
| | EN ISO 11925-2 i Exposure =30s | | within 60s <i>F</i> s≤150mm | r raming droplets/particles * | |
| С | EN 13823 | and | FIGRA≤250W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤15MJ</edge> | Smoke production ^f and Flaming droplets/particles ^g | |
| | EN ISO 11925-2 i Exposure=30s | | <i>F</i> s≤150mm within 60 s | | |
| 5 | EN 13823 | and | FIGRA≤750W/s | Smoke production ^f and Flaming droplets/particles ^g | |
| D | EN ISO 11925-2 i Exposure=30s | | <i>F</i> s≤150mm within 60 s | | |
| E | EN ISO 11925-2 i Exposure =15s | | <i>F</i> s≤150mm within 20 s | flaming droplets/particles h | |
| F | EN ISO 11925-2 ⁱ Exposure = 15 s | | Fs>150mm within 20 s | | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that Inmation contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exacting all their rights and obligation under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, foregrey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are rotatined for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@gs.com"

No.301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejjang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com



Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 6 of 7

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ^c Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR_{600s} ≤ 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- ^e For the product as a whole.
- f s1 = SMOGRA ≤ 30m²/s² and TSP_{600s} ≤ 50m² ; s2 = SMOGRA ≤ 180m²/s² and TSP_{600s} ≤ 200m²; s3 = not s1 or s2
- g d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.
- Ignition of the paper in EN ISO 11925-2 results in a d2 classification.
- h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- ¹ Under conditions of surface flame attack and, if appropriate to the end–use application of the product, edge flame attack.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior definedary and of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulliest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443



Test Report No.: AJFS2401001292FF Date: FEB.19, 2024 Page 7 of 7

Photo Appendix:

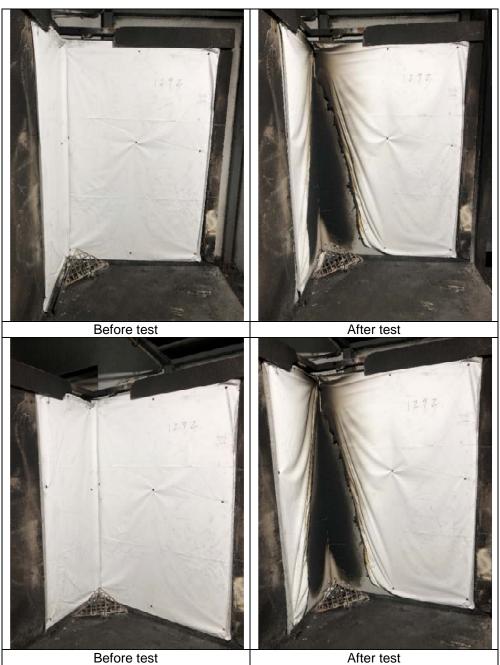

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any, The Company's sole responsibility is to its Client and this document cannot be expended except in full, without prior within approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 144 or email: CN.Doccheck@sgs.com

or email: CN_Doccheck@sg.s.com |No.301,Sunifgh Houstys Zone,Anji Courty, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国・浙江・安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sg.s.china@sgs.com